


Infrared Live Body Detection

Fast identify forehead, nose, chin, mouth, etc.



Specifications

| Hardware | |
|---------------------------|--|
| CPU | 1.2G Dual-Core ARM Cortex-A7 |
| NPU | 600G (0.6T) |
| RAM | 256M DDR3L |
| ROM | 4G EMMC |
| Camera | 200W HD Color Camera, 200W HD Infrared Camera, Wide Range |
| | Dynamic |
| Fill Light | LED Fill Light and Dual Infrared Fill Light |
| Display | 5 inch HD IPS Touch Screen, Resolution 1280*720 |
| Communication port | TCP/IP, USB-Type A(Support U disk), Wifi |
| Product Size | 155mm*133mm*25.5mm |
| Power | DC 12V, 1A |
| Working Temperature | 0~45 °C |
| Working Environment | Under normal light, strong light, dark environment, backlight |
| Firmware Specs | |
| os | Linux |
| Language | English, Spanish, Arabic, Thai, Russian, Portuguese, French |
| | Farsi, Vietnamese, Japanese, Turkish,and customizable |
| Verify Method | Face Recognition, ID Card(IC optional), Password, or combination |
| QR Code Scanner | Support |
| Face/Card/Password | 5000(50000 optional) |
| Capacity | |
| Logs Capacity | 500,000 |
| Face Recognition Speed | <0.2S |
| Face Recognition Distance | 0.5~2.5 meters(adjustable) |
| Live Face Detection | Reject Photo and Video |
| Special Features | At most 5 people face recognition at same time |
| | Happy birthday display and audio |
| | Mask detection and face recognition with wearing mask |
| Access Control Interface | |
| Relay output | One set |
| Wiegand | One set WG 26/34 Output |
| Exit button | Support |
| Door Bell | Support |

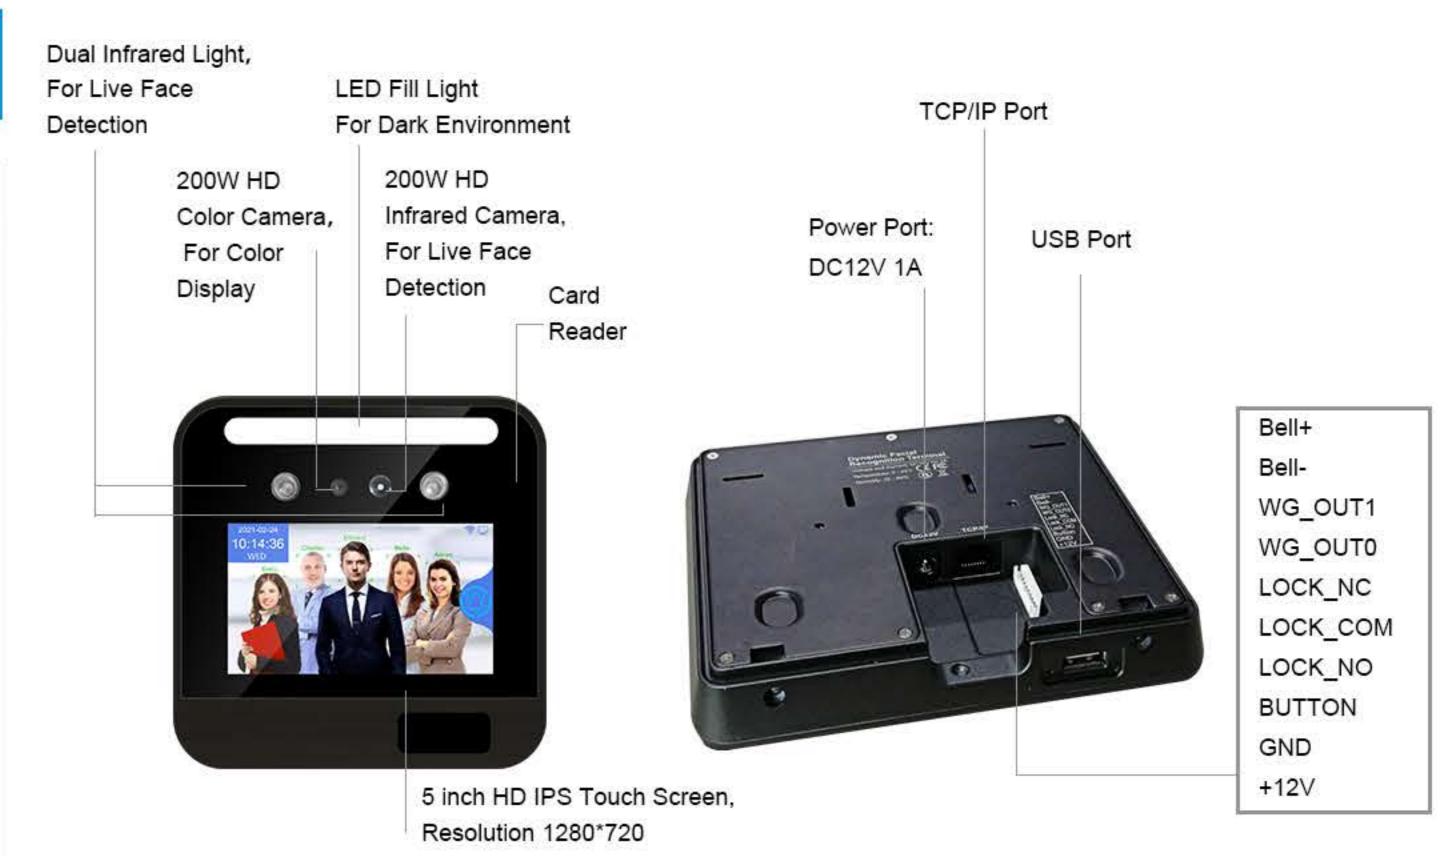

Single package size:

L218MM*W210MM*H110MM

- Gross Weight including package:
- around 1kg
- Carton box Dimension:

575*435*235MM, can hold 10pcs devices



